



HC 36/24
4921210080B




DEIF A/S

• (36 × 24)

• (AC) ;


• (DC) ;

• -7 (- , -)

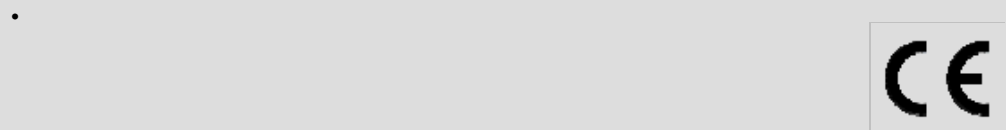


	AC -	DC -
	99 999,99 0	999 999,9 0
	1/100 (36 .)	1/10 (6 .)
	$4 \times 1,7$ (AC 60 -)	
	24 – 110 – 230 AC ± 10%	12...36 DC, 110 DC ± 10%
	.1 230 50	0,04...0,2 12...36 DC
	50 60	
	-10...55°C () -25...55°C () -25...60°C ()	-10...55°C () -10...55°C () -25...60°C ()
	HVE DIN 40040	JVE DIN 40040
	2 – 50 – 1	EN 61010-1
(EMC)	EN 50081-1/2 EN 50082-1/2	
	6,3 × 0,8	
	: IP40,	: IP00, 529 EN 60529.


Все размеры указаны в мм

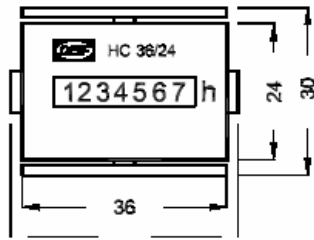

HC 36/24

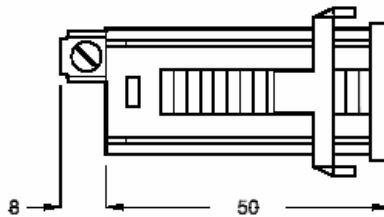

Вырез в панели: 22 × 33 мм + 0,5



Вес: Прибл. 0,040 кг

	HC 36/24	230	(AC)	60
	HC 36/24	12 ... 36	(DC)	



DEIF A/S, Frisenborgvej 33
DK-7800 Skive, Denmark

Tel.: +45 9614 9614, Fax: +45 9614 9615
E-mail: deif@deif.com, URL: www.deif.com

