


HC48

4921210090C

- (DC AC) -
- AC: ; DC: -
- IP40; - IP65 -
- DIN, 48 × 48 ;
- - 55 × 55
- 72 × 72

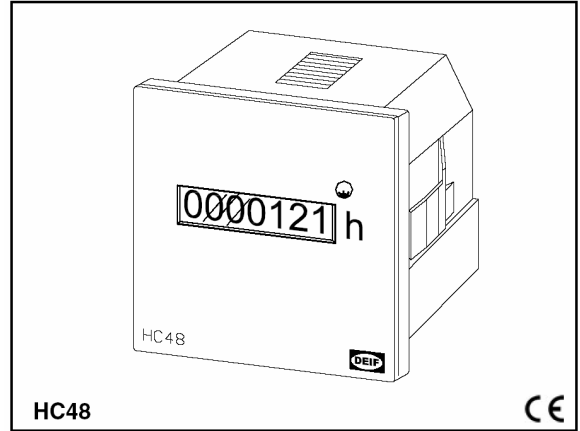

( ) HC48

32

- AC) 99 999, 99

- DC) 999 999,9

- AC DC:

4

( )

( )

A -

F -

D -

DIN

A

D -

DIN,

F

(1) ( . . ).

AC DC

6,3 × 8

6,3 × 8

48 × 48

55 × 55 72 × 72

IP65 (

EN 50081-1 EN 50082-2

AC: 24 , 110 , 230 , 400 (±10%)

DC: 10-48 , 110 (±10%)

AC: 50 , 60 ,

AC:

DC:

AC DC: IP40 -

AC: -25°C ... +80°C;

DC: -25°C ... +70°C

AC: 1/100 (36 .);


DC: 1/10 (6 .)


AC: 99 999,99 ;

DC: 999 999,9


AC: 5 , 2 ;

DC: 6 , 1 ;

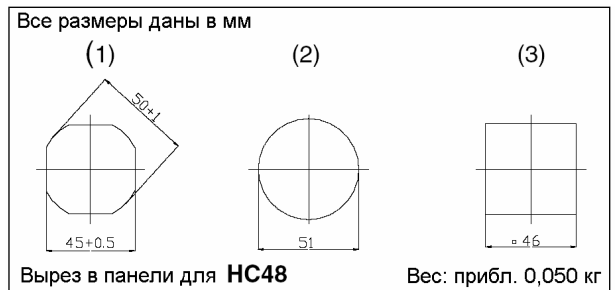

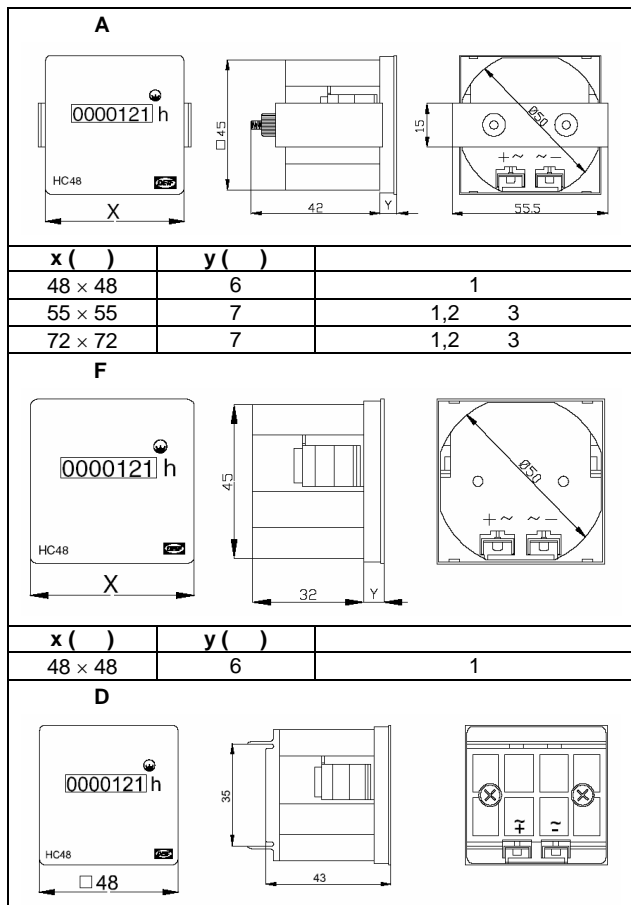

HC48	230 AC	50
HC48	10-48 DC	-
HC48	400 AC	60
:	-	-
D		IP40
A	72 × 72	IP40
A		IP65



DEIF A/S, Frisenborgvej 33  
DK-7800 Skive, Denmark

Tel.: +45 9614 9614, Fax: +45 9614 9615  
E-mail: deif@deif.com. URL: www.deif.com

